


# FOAM EDUCTOR

## Style 222 By-Pass Eductor

- Eductors are rated for optimum flow at 200 psi (14 bar) inlet pressure.
- Works well with nozzles rated at 75 psi (5 bar) and 100 psi (7 bar).
- Option flow rates at 60 GPM,95 GPM,and 125 GPM.  
(Style 222-60,Style 222-95,and Style 222-125 respectively).
- Allows the operator to easily change from water to foam without shutting down.
- Easy to change into water line use.
- Ball check valve prevents back flow into foam concentrate.
- Compatible with most foam concentrates.
- Complete with 6-1/2' pickup hose and 15" stainless steel tube.

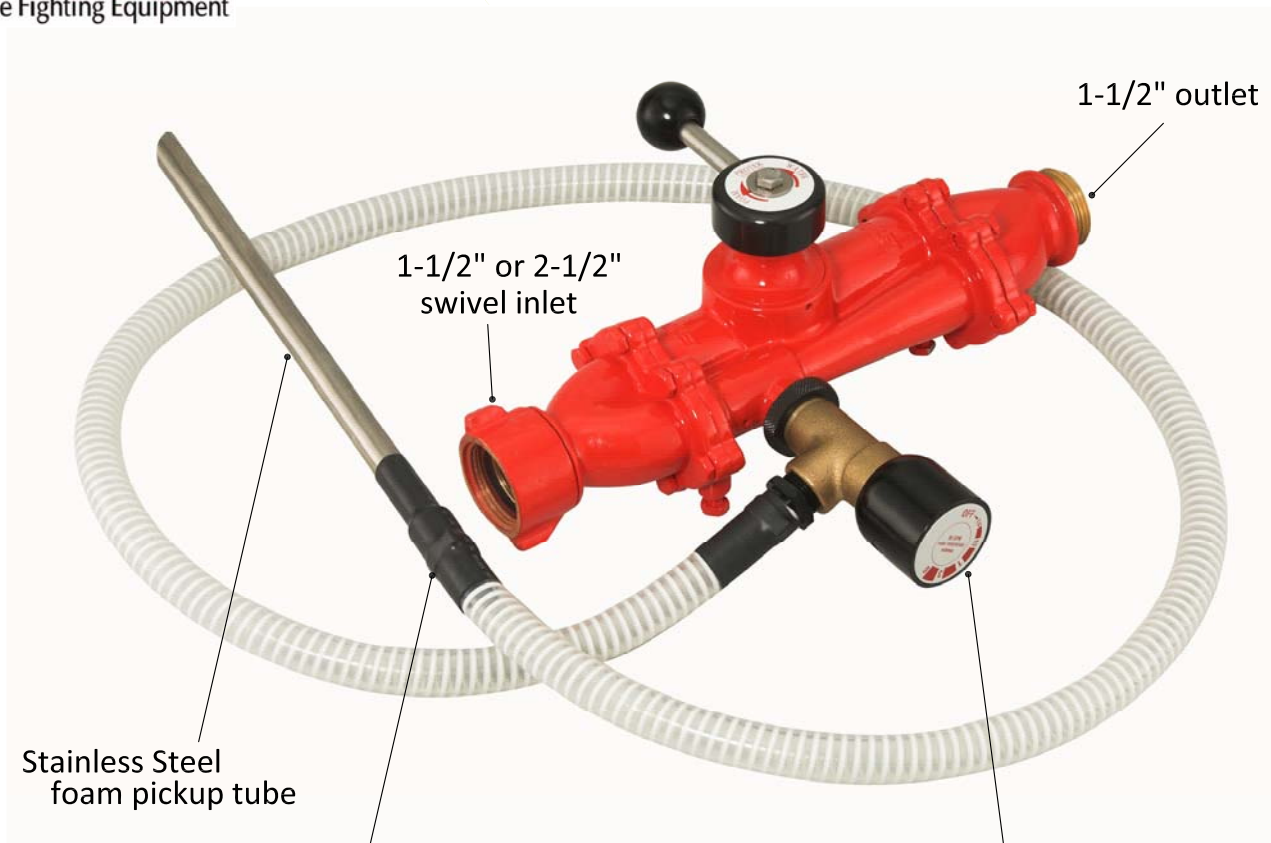

securely taped connection to prevent leakage

Metering dial with adjustable pickup rates

# FOAM EDUCTOR

## Specification

Style	Material	Inlet Size	Outlet	Flow		Length	Weight Lbs.(kg)
				GPM	LPM		
222-60	Brass	1-1/2" or 2-1/2" (38 or 65 mm)	1-1/2" (38 mm)	60	230	17" (432 mm)	22 (10 kg)
222-95	Brass	1-1/2" or 2-1/2" (38 or 65 mm)	1-1/2" (38 mm)	95	360	17" (432 mm)	22 (10 kg)
222-125	Brass	1-1/2" or 2-1/2" (38 or 65 mm)	1-1/2" (38 mm)	125	475	17" (432 mm)	22 (10 kg)

## Foam Eductor & Nozzle Compatibility Chart

Eductor	Recommended Nozzle For Use with Eductors
222-60	366,372,366-BC,372-BC
222-95	366,367,368,369,372,366-BC,372-BC,373-BC,374-BC
222-125	366,367,368,369,372,366-BC,372-BC,373-BC,374-BC

